




## Fender Splash Shield

Base Part Number: [16054](#)


### Removal

**NOTE:** *LH side shown, RH side similar.*



1. Remove the wheel and tire.  
Refer to: [Wheel and Tire](#) (204-04A Wheels and Tires, Removal and Installation).
2. If equipped, remove the pin-type retainer and position aside the front fender moulding.

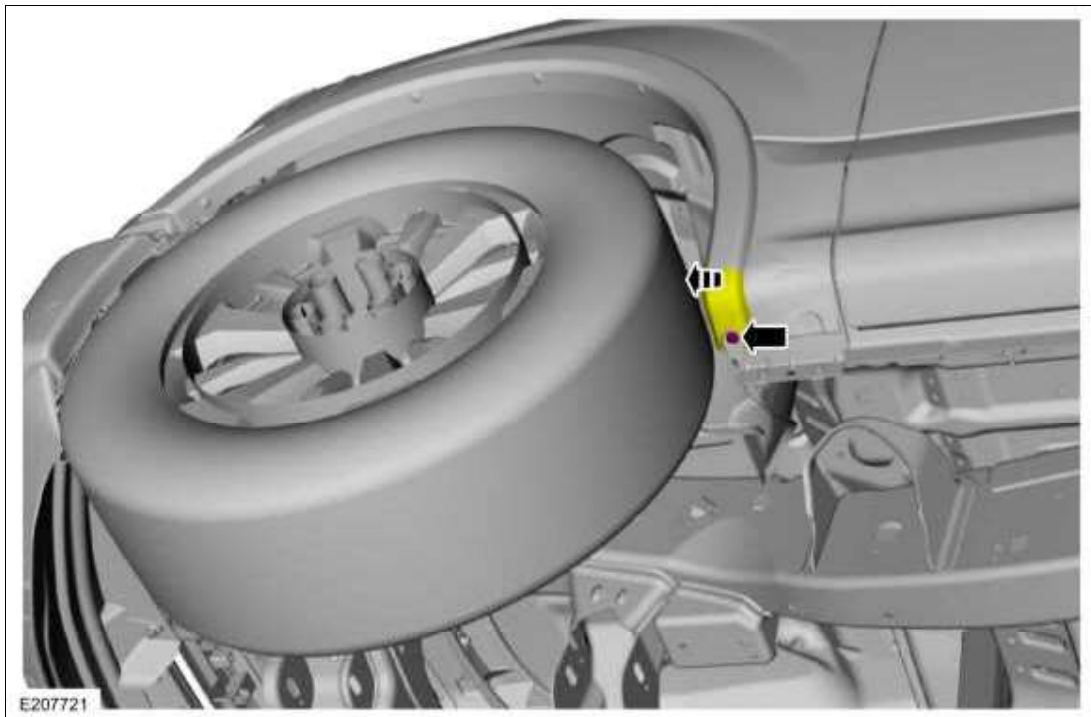


3. Remove the bolts.

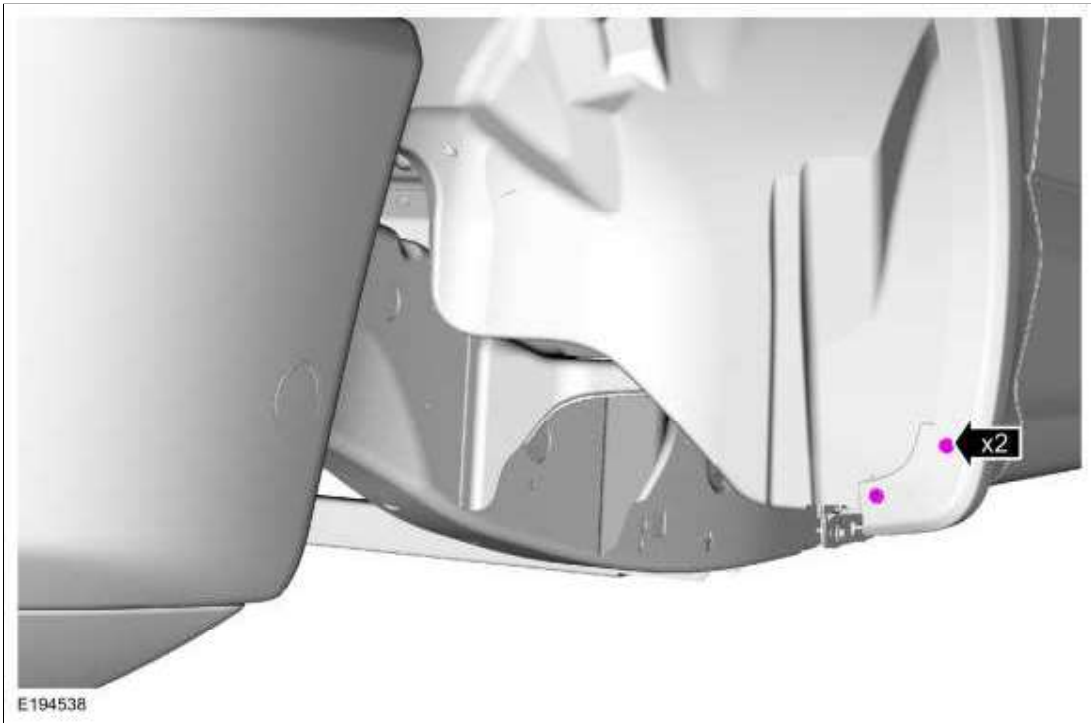


4. Remove the bolts and the pin-type retainer.

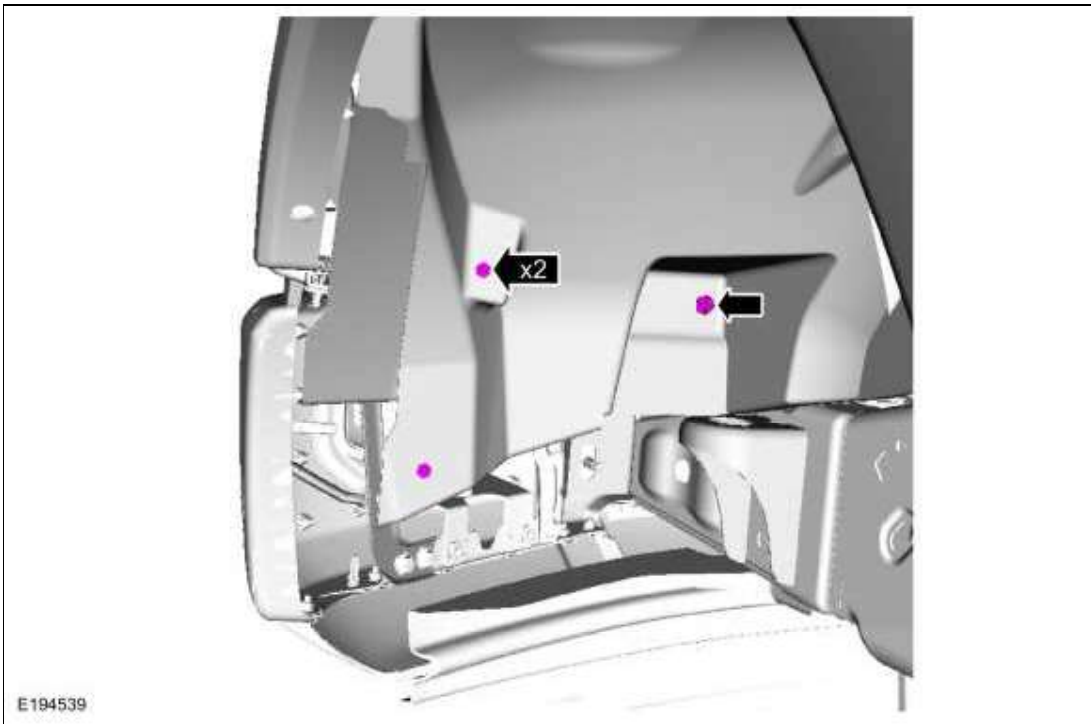

5. Remove the bolts.

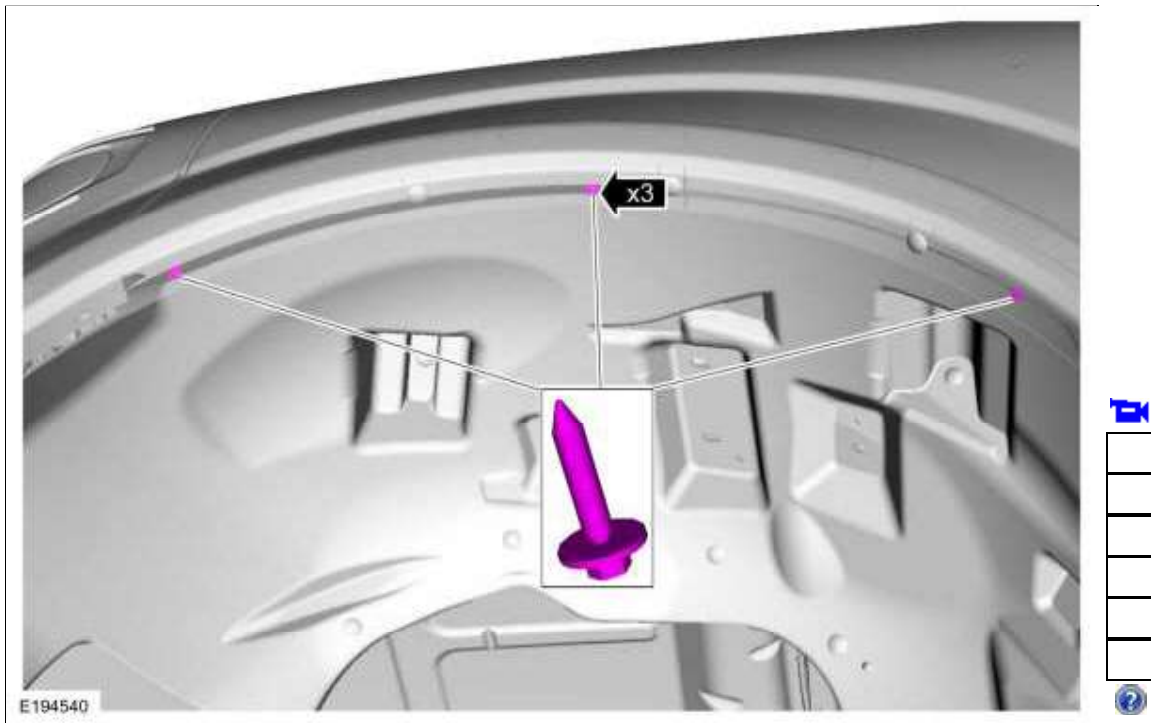


6. Remove the pin-type retainers.

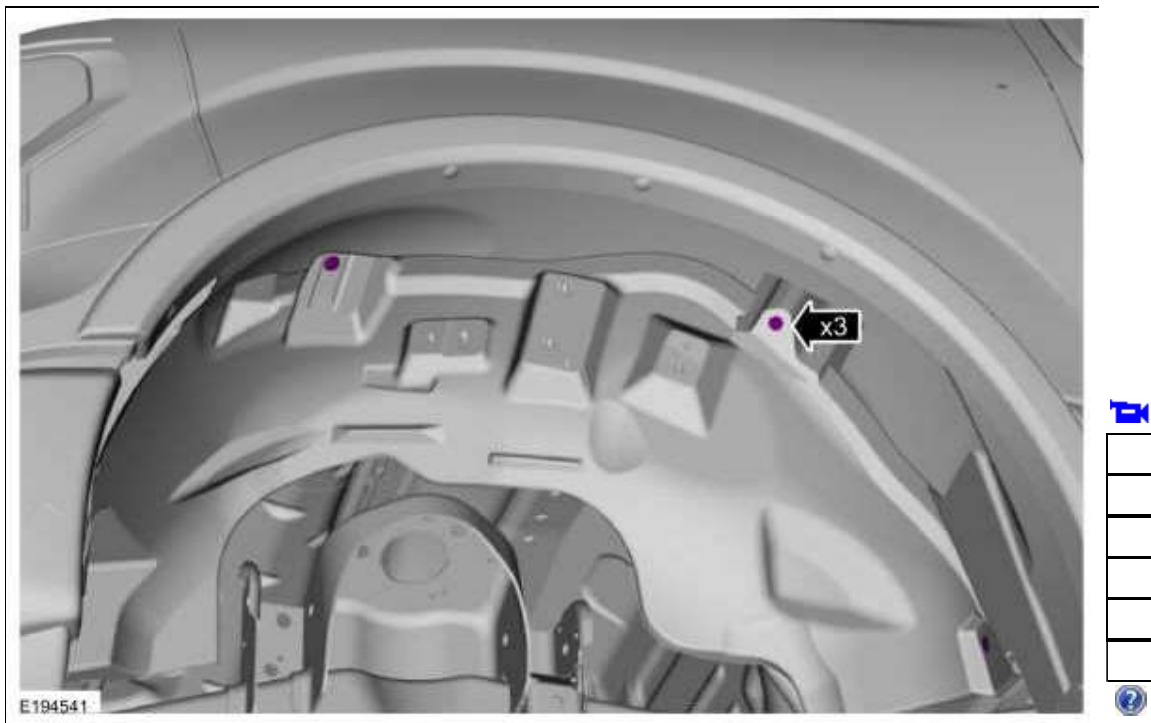

7. **NOTE:** Pin-type retainers vary based on trim level.

Remove the electrical pin-type retainers and the fender splash shield.

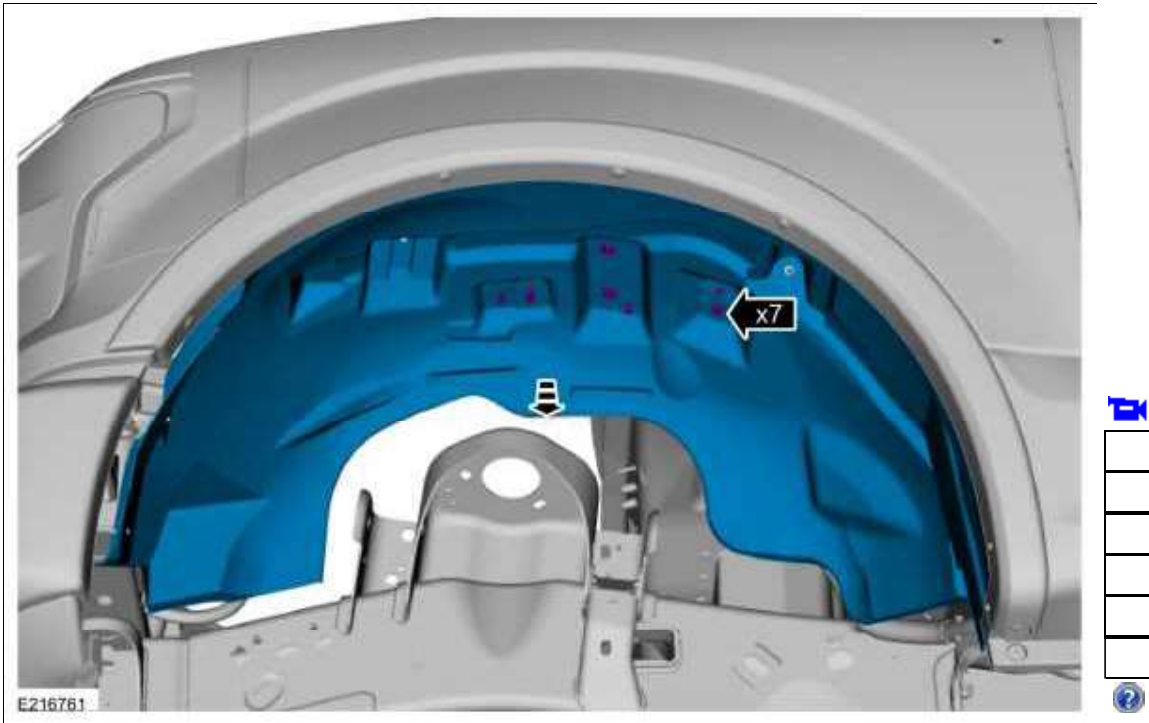

### Installation

1. To install, reverse the removal procedure.